


AMP SOCKET  
1-480459  
DEC1209340

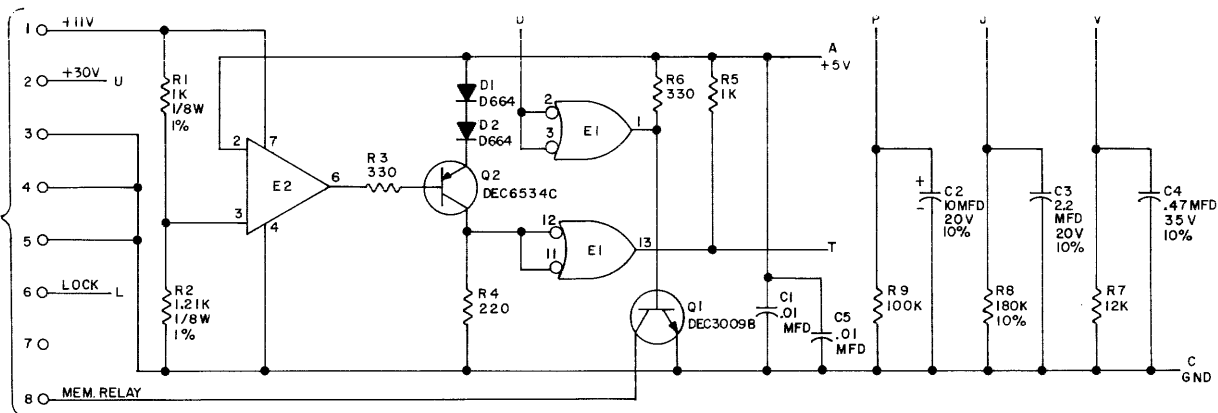

UNLESS OTHERWISE INDICATED:  
CAPACITORS ARE 100V, 20%  
RESISTORS ARE 1/4 W, 5%  
PIN 7 ON E1 = GND  
PIN 14 ON E1 = +5V  
E1 IS DEC 7401N  
E2 IS MC1709CG

| REV | CHG   | NO | REV |
|-----|-------|----|-----|
| 1   | 00001 | B  |     |

|       |      |
|-------|------|
| DRN.  | DATE |
| CHK'D | DATE |
| ENG'D | DATE |
| PROD  | DATE |

| TRANSISTOR & DIODE CONVERSION CHART |        |     |     |
|-------------------------------------|--------|-----|-----|
| DEC                                 | EIA    | DEC | EIA |
| D664                                | IN3606 |     |     |
| DEC3009C                            | 2N3009 |     |     |
| DEC6534                             | MP6534 |     |     |

|                          |
|--------------------------|
| <b>digital</b>           |
| EQUIPMENT<br>CORPORATION |
| MAYNARD, MASSACHUSETTS   |

| TITLE                                     |      |           |     |
|-------------------------------------------|------|-----------|-----|
| POWER SEQUENCE DELAYS<br>AND DECODER G827 |      |           |     |
| SIZE                                      | CODE | NUMBER    | REV |
| B                                         | CS   | G 827-0-1 | B   |
| PRINTED CIRCUIT REV                       |      |           |     |
| A                                         |      |           |     |

