


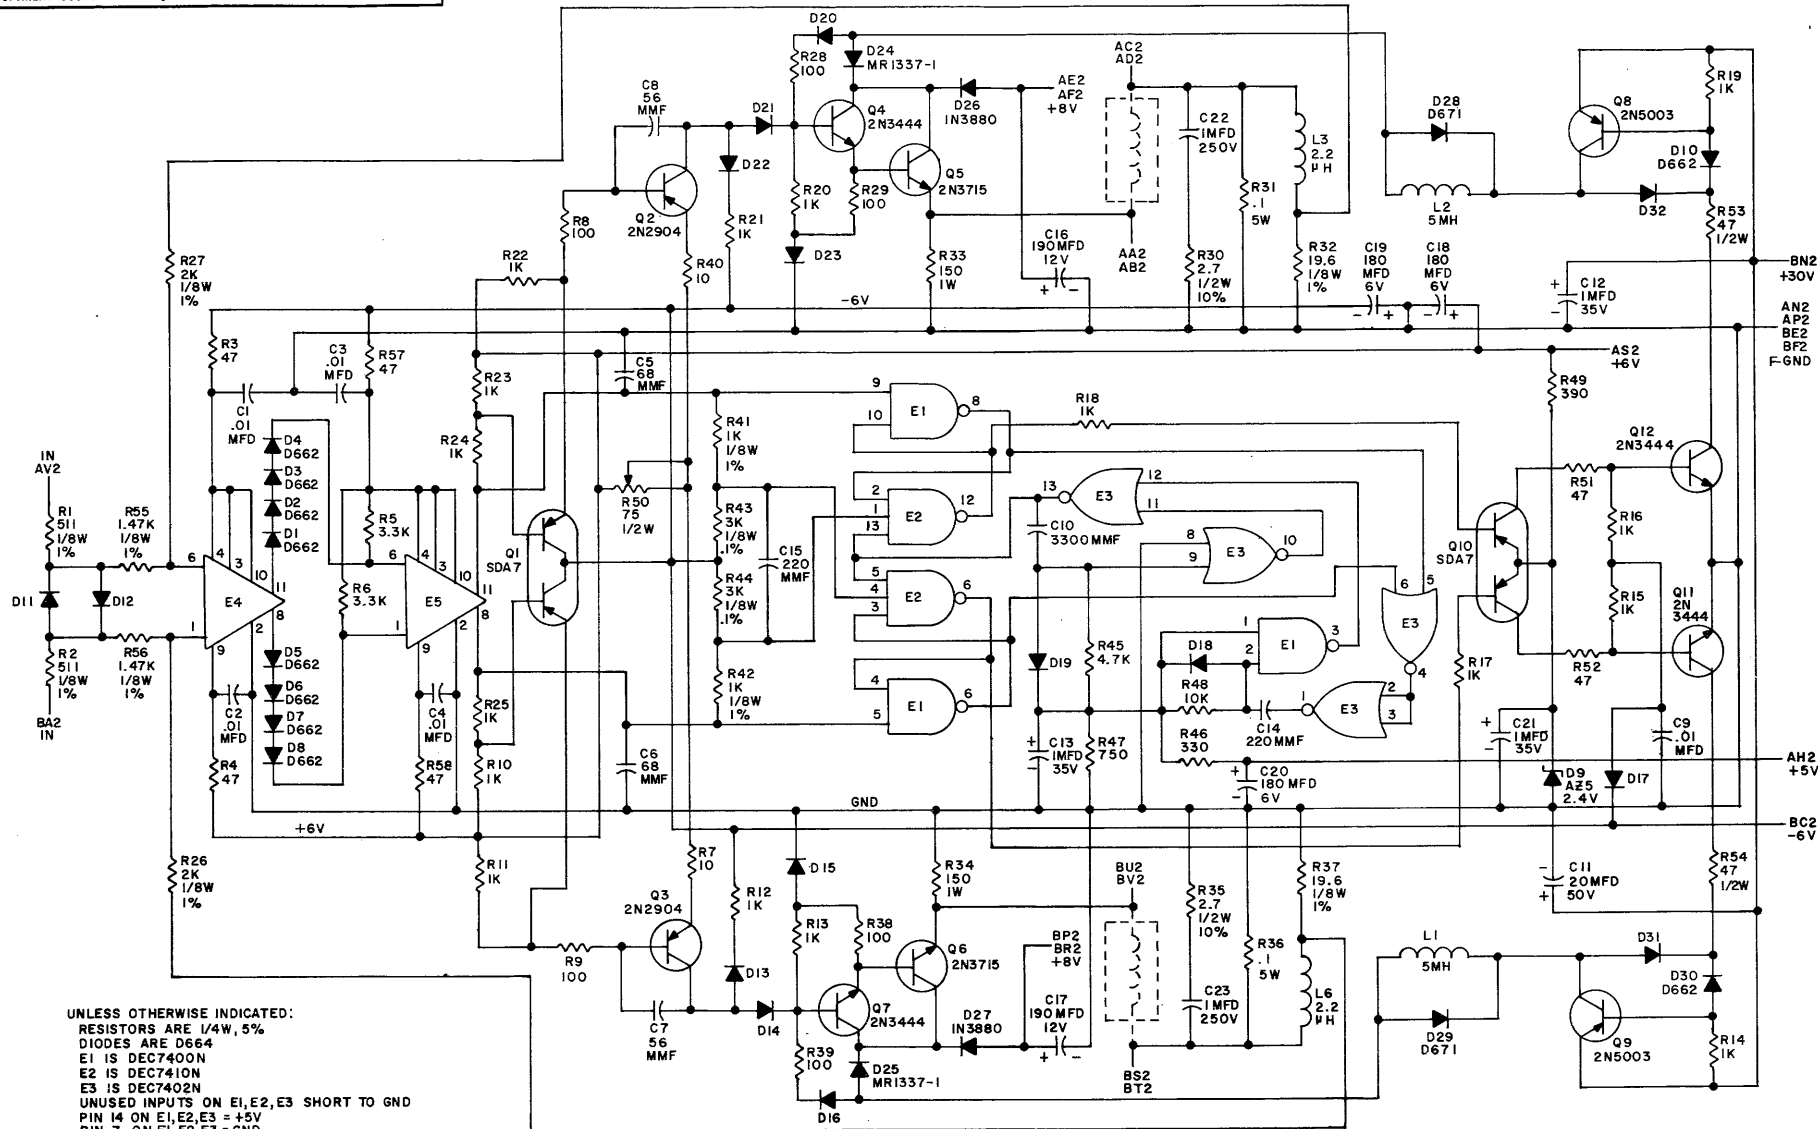

UNLESS OTHERWISE INDICATED:
 RESISTORS ARE 1/4W, 5%
 DIODES ARE D664
 E1 IS DEC7400N
 E2 IS DEC7410N
 E3 IS DEC7402N
 UNUSED INPUTS ON E1, E2, E3 SHORT TO GND
 PIN 14 ON E1, E2, E3 = +5V
 PIN 7 ON E1, E2, E3 = GND
 E4, E5 ARE CA3001
 DEFLECTION YOKE IS SHOWN DOTTED
 PINS AE2, AF2 ARE CONNECTED TO BP2, BR2
 WHEN BOARD IS PLUGGED INTO UNIT

REVISIONS
 CHG NO. REV.

DRN. 6-10-69
 CHK'D 6-19-69
 ENG. 6-20-69
 PROD. 6-22-69

TRANSISTOR & DIODE CONVERSION CHART			
DEC		EIA	
D662	IN645	2N3715	NONE
D664	IN3606	SDA 7	SAME
D671	IN3653	2N3444	NONE
IN3880	SAME	2N5003	NONE
MR1337-1	NONE	AZ5 2.4V	NONE

digital		TITLE	
EQUIPMENT CORPORATION		DEFLECTION AMPLIFIER	
MAYNARD, MASSACHUSETTS		G912	
SIZE	CODE	NUMBER	REV.
C	CS	G912-0-1	
PRINTED CIRCUIT REV.			8